





Asymmetric light distribution

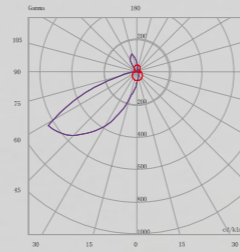


NL08 Garden light



NL08 LED garden light won 2020 IF Award, adopting high lumen SMD, aluminum body with great thermal management. It is IP65 IK08 high protection. Indirect lighting design offers a great visual experience. Special shape design provides charming light spot. Size 500mm and 1000mm for options.

- ▶ 50° IP65
- ▶ Flicker Free
- ▶ AC 200-240V PF ≥ 0.9 CRI ≥ 80
- ▶ SAA RoHS CE

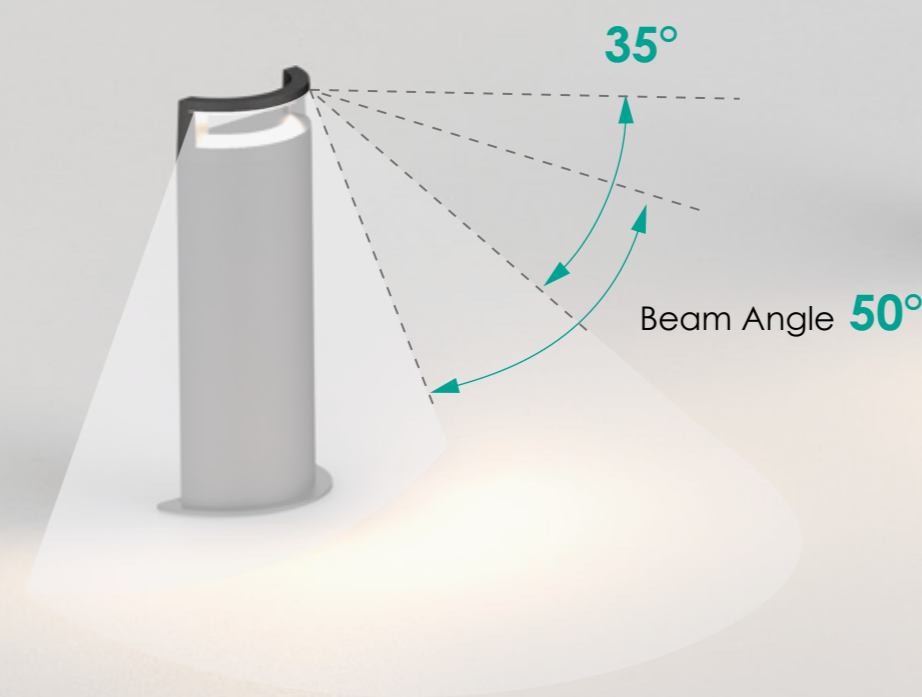


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NL08A-10W	10W	249x121x500	530lm	2.34	6PCS
NL08B-10W	10W	249x121x1000	530lm	4.03	2PCS

CCT ——— 3000K ——— 4000K ——— 5000K ——— 5700K

Finish ——— White Black

Lamp bollard ——— ACC-NL08B-00 ACC-NL08A-00 ACC-NL08-00




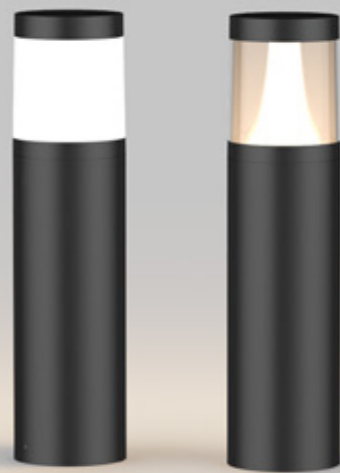

NL90A

NL90B

NL90A/B Garden light

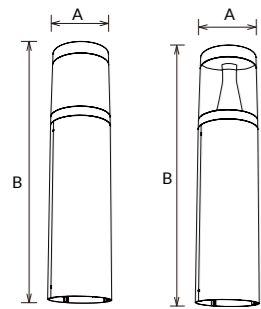



NL90 LED garden light provides a stylish architectural luminaire for outdoor applications. NL90A with milky PC cover for a uniform light output, NL90B combines reflector and transparent PC cover for down lighting, both of lighting module can be interchangeable. The ADC12 aluminum cylindrical lamp body with outdoor powder spray, anti-corrosion, IP65 and IK08 protection level make it a welcomed lamp in outdoor area.

- ▶ 320° 360° IP65
- ▶ Flicker Free 2 in 1
- ▶ AC 220-240V PF ≥ 0.9 CRI ≥ 80
- ▶ SAA RoHS CE

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NL90A-400-8W	8W	Ø100x400	750lm	1.15	6PCS
NL90A-750-8W	8W	Ø100x750	750lm	1.81	6PCS
NL90A-1000-8W	8W	Ø100x1000	750lm	2.29	6PCS
NL90B-400-8W	8W	Ø100x400	620lm	1.15	6PCS
NL90B-750-8W	8W	Ø100x750	620lm	1.81	6PCS
NL90B-1000-8W	8W	Ø100x1000	620lm	2.29	6PCS

CCT ——— 3000K 4000K 5000K 5700K

Finish ——— White Black

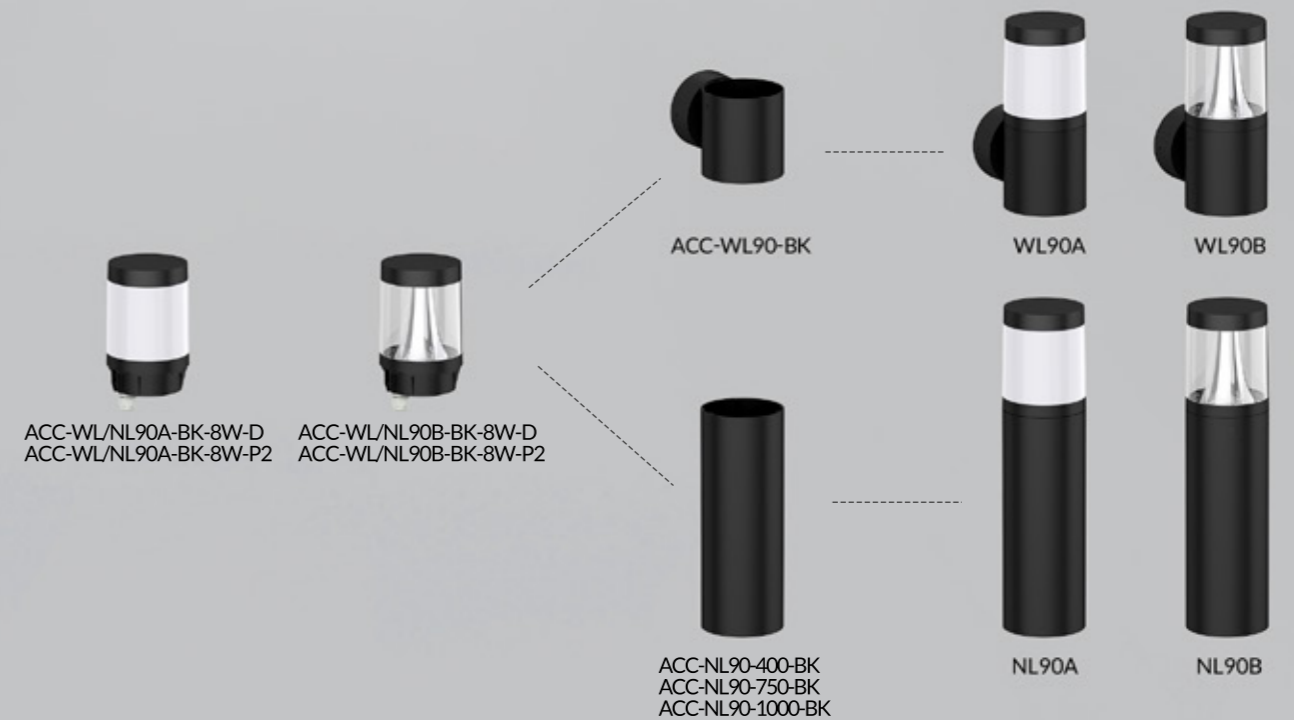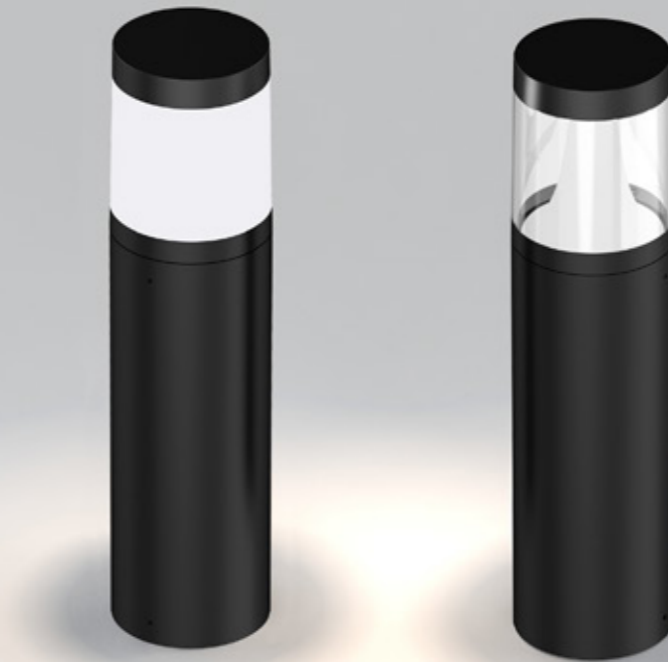




NL06A

NL06B

NL06 Spike light



NL06 garden light adopts 2835SMD light source and high reflective rate lens, the lamp body adopts ADC12 aluminum material, which has a strong heat dissipation, anti-corrosion abilities. Low working voltage & low power to ensure safe using. IP65 and IK10 protection level.

- ▶ 45° 60° IP65
- ▶ Flicker Free
- ▶ AC 100-240V PF ≥ 0.9 CRI ≥ 80
- ▶ SAA RoHS CE


Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NL06-6W	6W	82.5x163/ 82.5x304	700lm	0.51	24PCS
NL06-8W	8W	82.5x163/ 82.5x304	900lm	0.54	24PCS

NL90A


NL90B

CCT 3000K 4000K 5000K 5700K

Finish White Black

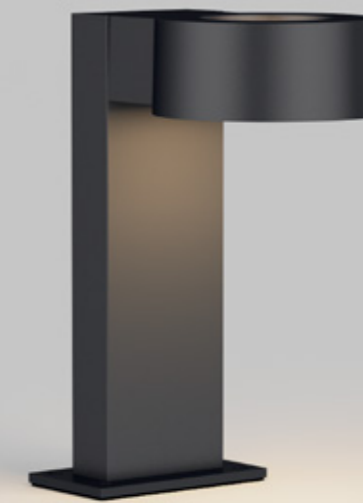

ML08 Garden light



ML08 LED garden light is a stylish architectural luminaire with double-sided light design. Aluminum material provides excellent thermal management. IP65 waterproof is suitable for outside garden. The holder length is optional among 300mm, 500mm, 700mm, and 1000mm.

- ▶ 120° IP65
- ▶ Flicker Free
- ▶ AC 100-240V PF ≥ 0.9 CRI ≥ 80
- ▶ SAA RoHS CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
ML08-300-8W	8W	300x208xØ140	655lm	1.30	6PCS
ML08-500-8W	8W	500x208xØ140	655lm	1.72	6PCS
ML08-700-8W	8W	700x208xØ140	655lm	2.15	6PCS
ML08-1000-8W	8W	1000x208xØ140	655lm	2.62	6PCS


CCT 3000K 4000K 5000K 5700K

Finish White Black



NL14 Series

NL14 Spike light

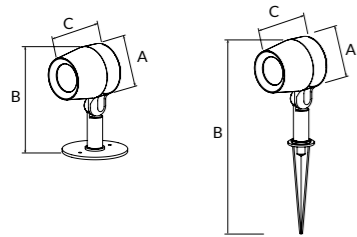

NL14 LED spike light is derived from the aircraft engine design. ADC12 aluminum lamp body provides strong heat dissipation. AC220V and AC/DC12V with ground install and board install option. Type A/ B/E/F are isolated driver while Type C/D/G/H are non-isolated driver. IP65 waterproof and flicker free are available.

- ▶ 45° 60° IP65
- ▶ Flicker Free
- ▶ AC 100-240V PF ≥ 0.9 CRI ≥ 80
- ▶ SAA RoHS CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
NL14A-8W	8W	80x104x308.5	910lm	0.37	24PCS
NL14B-8W	8W	80x104x167.5	910lm	0.39	24PCS
NL14C-8W	8W	80x104x308.5	910lm	0.37	24PCS
NL14D-8W	8W	80x104x167.5	910lm	0.39	24PCS
NL14E-8W	8W	80x143x308.5	910lm	0.38	24PCS
NL14F-8W	8W	80x143x167.5	910lm	0.39	24PCS
NL14G-8W	8W	80x143x308.5	910lm	0.38	24PCS
NL14H-8W	8W	80x143x167.5	910lm	0.39	24PCS

CCT ——— 3000K 4000K 5000K 5700K

Finish ——— White Black



Alanoed reflector

Aircraft engine design



NL14A-8W
AC 220V

NL14B-8W
AC 220V

NL14C-8W
AC 220V

NL14D-8W
AC 220V

NL14E-8W
AC 220V


NL14F-8W
AC 220V

NL14G-8W
AC/DC 12V

NL14H-8W
AC/DC 12V



ML06 Spike light



ML06 LED Spike light adopts aluminum body and plastic spike for damp conditions. The AC/DC12V input provides more safety guarantee. IP65 for outdoor use, it applies to landscaping embellishment lighting for residence and community and all kind of parks.

- ▶ 60°
- ▶
- ▶
- ▶


Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
ML06-6W	6W	Ø72x243x97	360lm	0.24	50PCS

CCT — 3000K 4000K 5000K 5700K

Finish — Black



ML07 Spike light

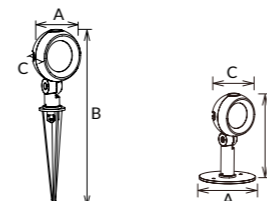

ML07A ML07B

ML07 LED Spike light adopts integrated SMD light source of fashion design, equipped with high lumen, high CRI, low temperature and long lifespan. Built-in driver, the AC/DC12V input provides more safety guarantee. IP65 for outdoor use, it applies to landscaping embellishment lighting for residence and community and all kind of parks.

- ▶ 36° 60°
- ▶
- ▶
- ▶

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
ML07-6W	6W	Ø76x262x57.5	550lm	0.31	50PCS
ML07-10W	10W	Ø76x262x57.5	950lm	0.31	50PCS
ML07B-6W	6W	Ø100x156xØ76	550lm	0.40	24PCS
ML07B-10W	10W	Ø100x156xØ76	950lm	0.40	24PCS

CCT — 3000K 4000K 5000K 5700K

Finish — Black