




# OL02 LED freestanding luminaire

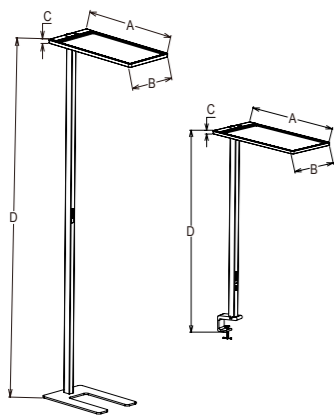

This OL02 freestanding lamp is composed of three parts: flat lamp body, lamp pole and lamp base. With a precise optical design (UGR<14, up 75% & down 25% lighting), it can ensure a more uniform and more comfortable lighting effect. Lamp Pole with: Plug, touchable 0-10V dimmer, light sensor and PIR sensor module.


- ▶ 75%  
25% UGR<14
- ▶ 0-10V
- ▶ AC 220-240V PF≥0.93 CRI≥80
- ▶ RoHS CE

Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL02/B-75W-DOS	75W	720x340x21.5x1925	8200lm	Flat lamp body:2.70 Lamp pole:3.10 Lamp base:6.70	6PCS 6PCS 2x3PCS
OL02C/D-75W-DOS	75W	720x340x21.5x1288	8200lm	Flat lamp body:2.70 Lamp pole:3.00	6PCS 6PCS

CCT 3000K-5700K

Finish White Black

- Indirect lighting and direct lighting (500-700LUX on the desk)
- PMMA LGP with Prismatic diffuser to achieve UGR<14 ideal for office lighting.

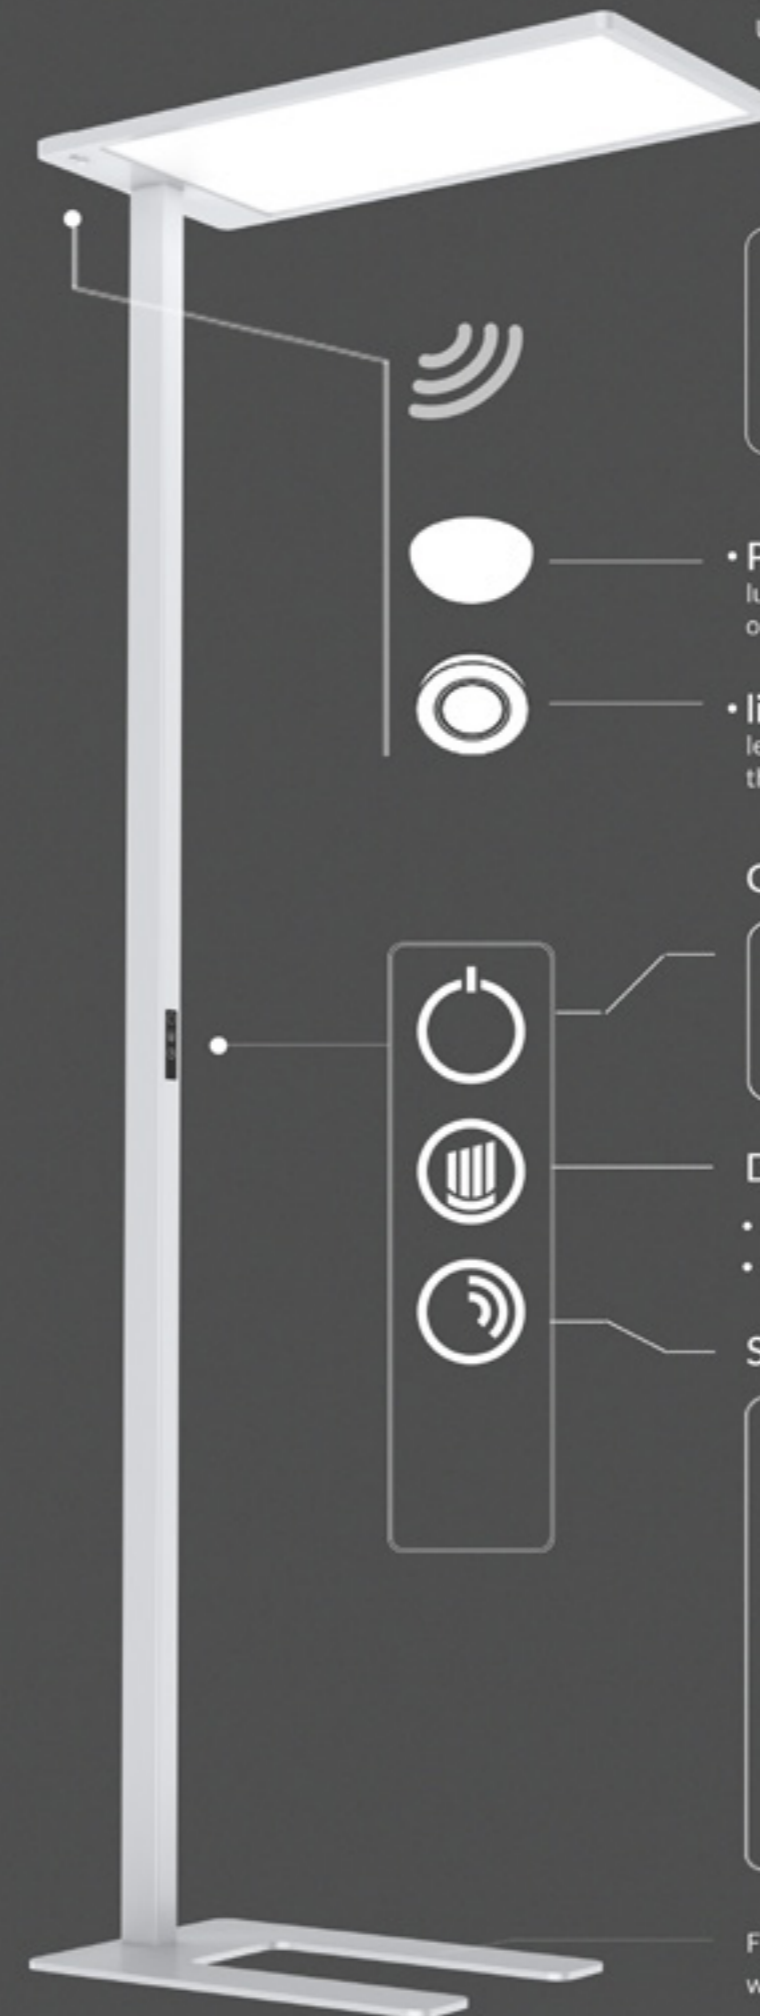


## STATUS



• **PIR sensor** detector automatically switches the luminaire on and then switches it off when there is no one in the room.

• **light sensor** continuously measures the illuminance level on the desk and dims the light itself depending on the amount of available daylight and artificial lighting.

## ON/OFF

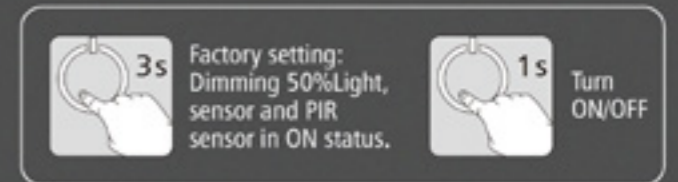

## Dimming button

- Short press in 1s, brightness will increase/ decrease 5%
- Long press brightness will increase/ decrease continually


## Sensor



Flat lamp base with reliable stability, saving space and widely work with office furniture



# OL06 LED freestanding luminaire

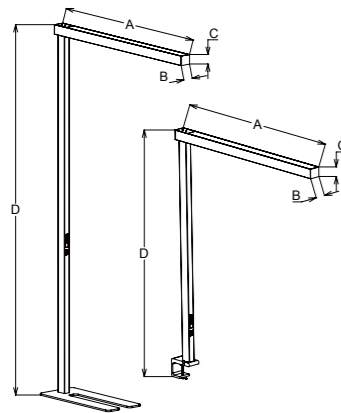

This OL06 free-standing luminaire is composed of three parts. OL06A is for floor standing, OL06B is for desk installation. OL06C is for floor standing with smart control, OL06D is for desk installation with smart control. Direct and indirect optic design, UGR<16, up 75% & down 25% lighting, up to 125lm/W high light efficiency. 0-10V dimmer, light sensor, PIR sensor module and USB connector are available. The configuration of the luminaire is triggered by pressing a button. The lighting control modules are interchangeable, which is very suitable for modern office environments.

- ▶ 80°x50°
- ▶ 60°x60° x15°
- ▶ UGR<16
- ▶ 0-10V
- ▶ Smart Lighting
- ▶ CANSAMBI
- ▶ AC 220-240V
- ▶ PF≥0.93
- ▶ CRI≥80
- ▶ RoHS
- ▶ CE


Code	Watt	Size(AxBxCxDmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL06A-80W-DOS	80W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06B-80W-DOS	80W	1060x60x53x1276	10500lm	5.10	3PCS
OL06C-85W-B	85W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06C-75W-B1	75W	1060x60x53x2026	10500lm	Flat lamp body+Lamp pole:5.70 Lamp base:6.80	3PCS 3PCS
OL06D-85W-B	85W	1060x60x53x1276	10500lm	5.10	3PCS
OL06D-75W-B1	75W	1060x60x53x1276	10500lm	5.10	3PCS

CCT 3000K 4000K 5000K 5700K

Finish White



# OL07 LED freestanding luminaire

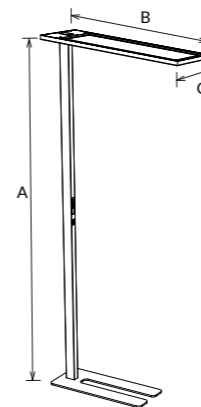

OL07 LED freestanding luminaire with professional version and intelligent version. The professional version could be PIR sensor and daylight sensor. The intelligent version could be CCT changeable and dim by CANSAMBI. 120 degree beam angle and UGR<16 could provide uniform lighting performance.

- ▶ 120°
- ▶ IP20
- ▶ UGR<16
- ▶ 0-10V
- ▶ Smart Lighting
- ▶ CANSAMBI
- ▶ AC 220-240V
- ▶ PF≥0.9
- ▶ CRI≥80
- ▶ RoHS
- ▶ CE

Code	Watt	Size(AxBxCmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL07A-75W-DOS	75W	1925x920x300	7500lm	14	3PCS
OL07A-100W-DOS	100W	1925x920x300	10000lm	14	3PCS
OL07B-85W-B	85W	1925x920x300	8500lm	14	3PCS
OL07B-100W-B	100W	1925x920x300	10000lm	14	3PCS
OL07B-75W-B1	75W	1925x920x300	7500lm	14	3PCS
OL07B-100W-B1	100W	1925x920x300	10000lm	14	3PCS


CCT 3000K 4000K 5000K

Finish White





# OL01 LED freestanding luminaire

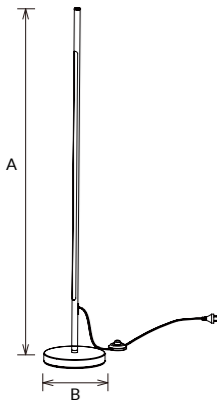

OL01 is a freestanding light combines modern industrial style, the unique shape and simple design perfectly fit the aesthetic concept of modern society. It adopts Tuya WIFI+2.4G intelligent technology, create various atmospheres, can switch to different lighting scenes according to your needs. Supporting both smart phone control and remote control, make it very convenient and easy control for different users. The slender body, plug and play, makes it convenient for different position.

- ▶ 120° IP20
- ▶ AC 200-240V PF≥0.9 CRI≥80
- ▶ RoHS CE

Code	Watt	Size(AxBmm)	Lumen(±5%)	N.W/pc(kgs)	Q'ty/CTN
OL01-15W-WG	15W	1600x182	1400lm	Base:2.2 Lamp Body:0.6	6PCS 18PCS

CCT 3000K-5700K

Finish White Black

